



Lion Series: TEC-500-2050-005




Description:

The TEC-500-2050-005 is an External Cavity Diode Laser in Littman Configuration. It is designed for applications which require high mode-hop free tuning range, high output power and low linewidth like for molecule and trace gas detection as well as telecommunication.

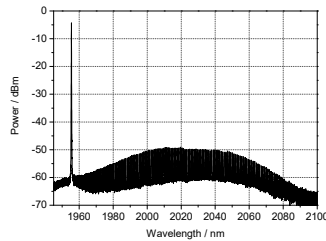


**Wavelength
Lower Border of the Tuning Range**

Wavelength: < 1980nm
Power: 7mW

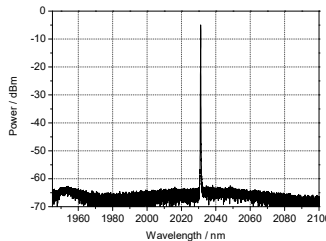

**Wavelength
Gain Maximum**

Wavelength: 2030nm
Power: 8mW



**Wavelength
Upper Border of the Tuning Range**


Wavelength: > 2100nm
Power: 5mW

Specification:	output power	>2mW, typ. >5mW at gain maximum
	beam profile	almost round
	polarization	linearly, typ. > 100:1
	linewidth (1ms)	< 100kHz
	linewidth (1s)	< 1MHz (typ.)
	side mode suppression	> 40dB, typ. > 45dB
	coarse tuning range	> 120nm
	piezo fine tuning rate	> 0.4GHz/V
	piezo fine tuning range @ 27V (100V)	> 10GHz (40GHz)
	mechanic cavity resonance	> 1.7 kHz
	thermal stability	< 100 MHz/°C

Document: <http://docs.sacher-laser.com/s5-2050-lm.pdf>
 Note: Specification are subject to change without further notice.



Mode-Hop Free Tuning:

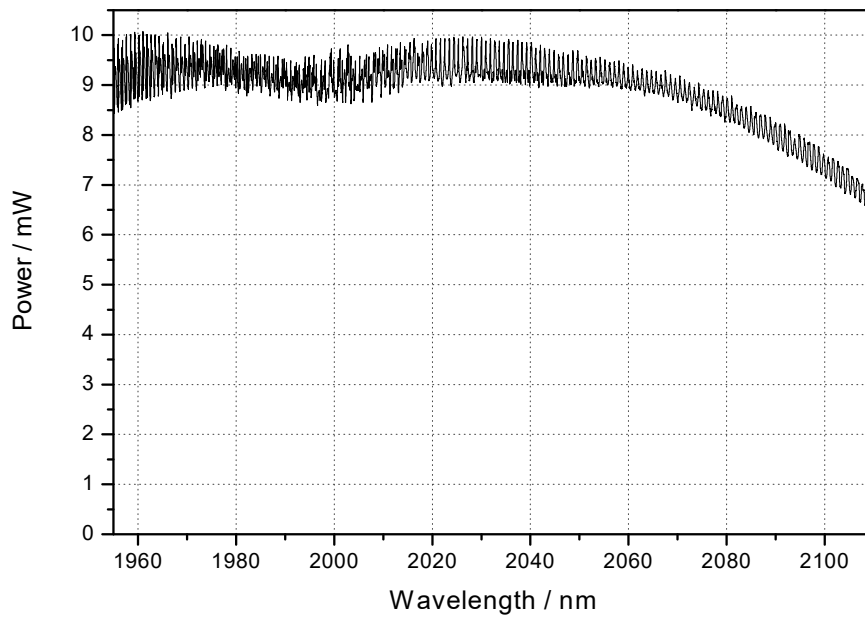

10s of Nanometers of mode-hop free tuning due to patented cavity design,
 c/f <http://docs.sacher-laser.com/pivotpoint.pdf>, page 12 .. 15

Document: <http://docs.sacher-laser.com/s5-2050-lm.pdf>

Note: Specifications are subject to change without further notice.

Sacher Lasertechnik GmbH
 Rudolf Breitscheid Str. 1-5
 D-35037 Marburg, Germany

Tel.: +49 6421 305290
 Fax: +49 6421 305299
 Email: contact@sacher.de

Sacher Lasertechnik, LLC
 5765 Equador Way
 Buena Park, CA 90620, USA

Tel.: 1-714-670-7605
 Fax: 1-714-670-7662
 Email: sales@sacher-laser.com

